ALLIANCE AUTOMATION

INNOVATE. CREATE. ADVANCE.

www.allianceautomation.com

1100 John Brown Rd.
Van Wert, Ohio 45891
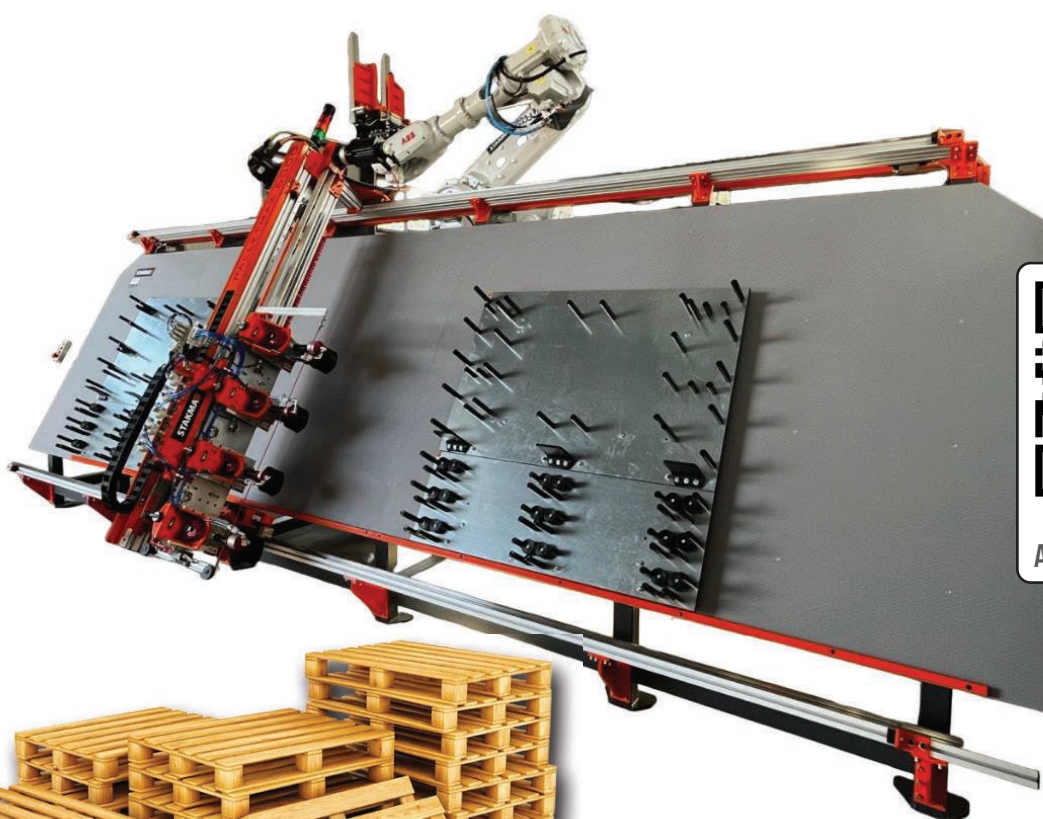
419.238.2520

PALLET**MAX**
Pallet production machine
Less workforce, more productivity!

Efficient, stable, simple.

It has never been so easy to produce pallets!
Discover new features of producing pallets in the simplest way.
Change your pallet dimensions in less than 10 minutes,
no programming needed.

LEARN MORE
ABOUT PALLETMAX

WARRANTY 1 YEAR WARRANTY

ProductionAnalytics™
transfer your production data simple   v1.0

PALLETMAX
Less workforce more productivity!

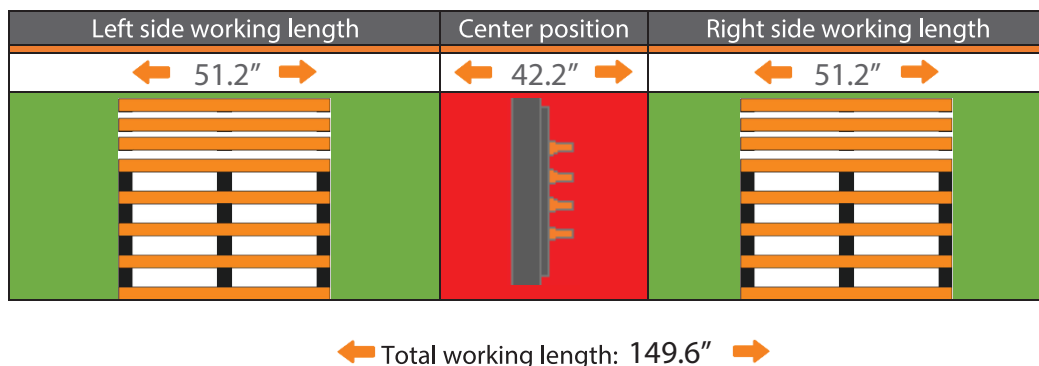| ✅ PALLETMAX Machine advantages	📦 PALLET Types	⚫ Standard equipment	⚪ Option equipment
Online service for easy maintenance	EUR1	MAX CN80	Additional Nailing gun No.4
High productivity and economic efficiency	EUR2	MAX CN55	Adjustable pallet template
Wide range of applications	EUR3	MAX CN80	Robot arm for pallet stacking
Excellent operating convenience	2-way	Standard magazines	Extended machine dimensions
Easy and fast new pallet training	4-way	Standard pallet templates	Extended machine warranty
Automatic nail counting	CP1-9	Working length: 149.6″	Extended robot arm warranty

PALLETMAX: Machine models

Nailing guns: standard configuration of installed nailing guns in machine

Machine type	Machine length	Working length	Length without arms	Width	Height
PALLETMAX 4500	216.5"	149.6"	177"	82.5"	102"
PALLETMAX 6000	275.6"	204.7"	236"	82.5"	102"
PALLETMAX 7000	315"	244"	275.6"	82.5"	102"
PALLETMAX 7500	334.6"	263.8"	295"	82.5"	102"
PALLETMAX 8000	354.3"	283.5"	315"	82.5"	102"
PALLETMAX 9000	393.7"	322.8"	354"	82.5"	102"
PALLETMAX 10000	433"	362"	394"	82.5"	102"
PALLETMAX 12000	492"	441"	472.5"	82.5"	102"

PALLETMAX: Working range

Working range: length 149.6" x width 66.9"

Left side working length	Center position	Right side working length
← 51.2" →	← 42.2" →	← 51.2" →

← Total working length: 149.6" →

PALLETMAX: Nailing guns

Nailing guns: machine standard configuration

No.	Nailing gun	Magazine	Reach of Nailing gun
3	MAX CN80	Standart	↓ ↑ 10.2" - 41"
2	MAX CN55	Standart	↓ ↑ 0" - 42.5"
1	MAX CN80	Standart	↓ ↑ 0" - 28.7"